

# PIR Panel

## PIR - insulation

Unisol PIR Panels have been specifically developed for those rare situations in which EPS panels cannot be used. In terms of dimensions and appearance, Unisol PIR panels are identical to EPS and rock wool panels and can easily be combined with both.

### Application:


- Internal & external

### Technical details:

- Cover width: 1190 mm
- Steel plate thickness: 0.55 (standard polyester)
- Steel quality: S280GD+Z275
- Thickness: 50 to 180 mm (non-standard thicknesses on request)
- Length: 900 – 15,000 mm
- Insulation: Polyisocyanurate 35 kg p/m<sup>3</sup>
- Colour: Your choice
- Profiling: Your choice

### Description of steel plate:

- Paint: Polyester paint 25 µm steel thickness 0.55 mm gloss level 30%
- Plastisol: HPS Plastisol 200 µm steel thickness 0.60 mm
- Foodsafe: Foodsafe Coating 9010 55 µm steel thickness 0.55 mm (PET)
- Colorfam: Colorfarm Coating 9002 55 µm steel thickness 0.60 mm for aggressive environments

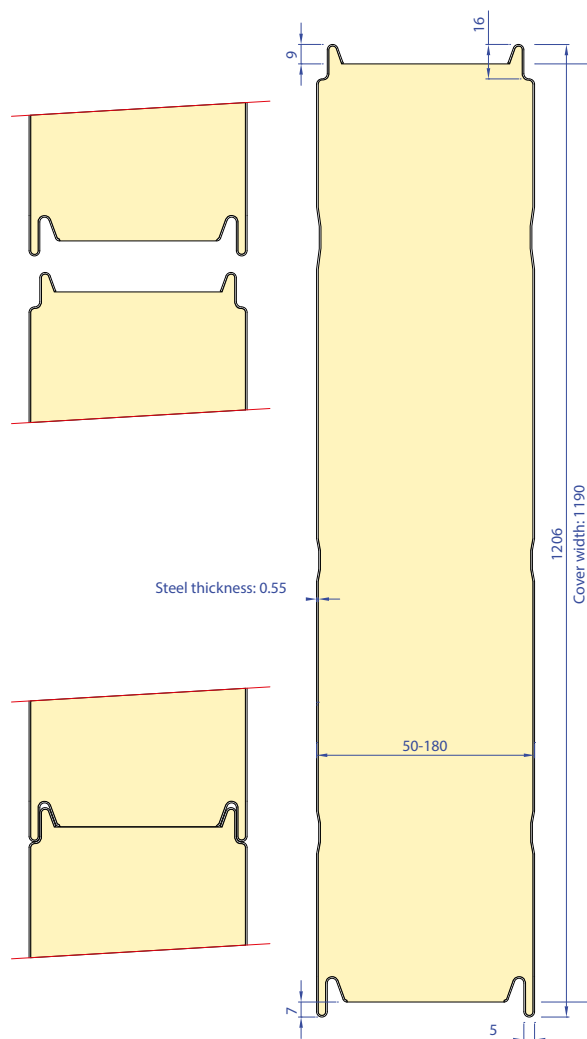

Thickness mm	Weight kg/m <sup>2</sup>	R-value m <sup>2</sup> K/W	Fire-retardant minutes	Noise dampening dB(A)	Span metres*
50	10.85	2.580			2.00
60	11.20	3.076			3.00
80	11.90	4.083			3.00
100	12.60	5.075			4.00
120	13.30	6.062			4.00
150	14.35	7.820			5.00
180	15.40	9.324			6.00

\*Experience-based figure for maximum span




# Colours

## Standard paint colours




## Plastisol colours

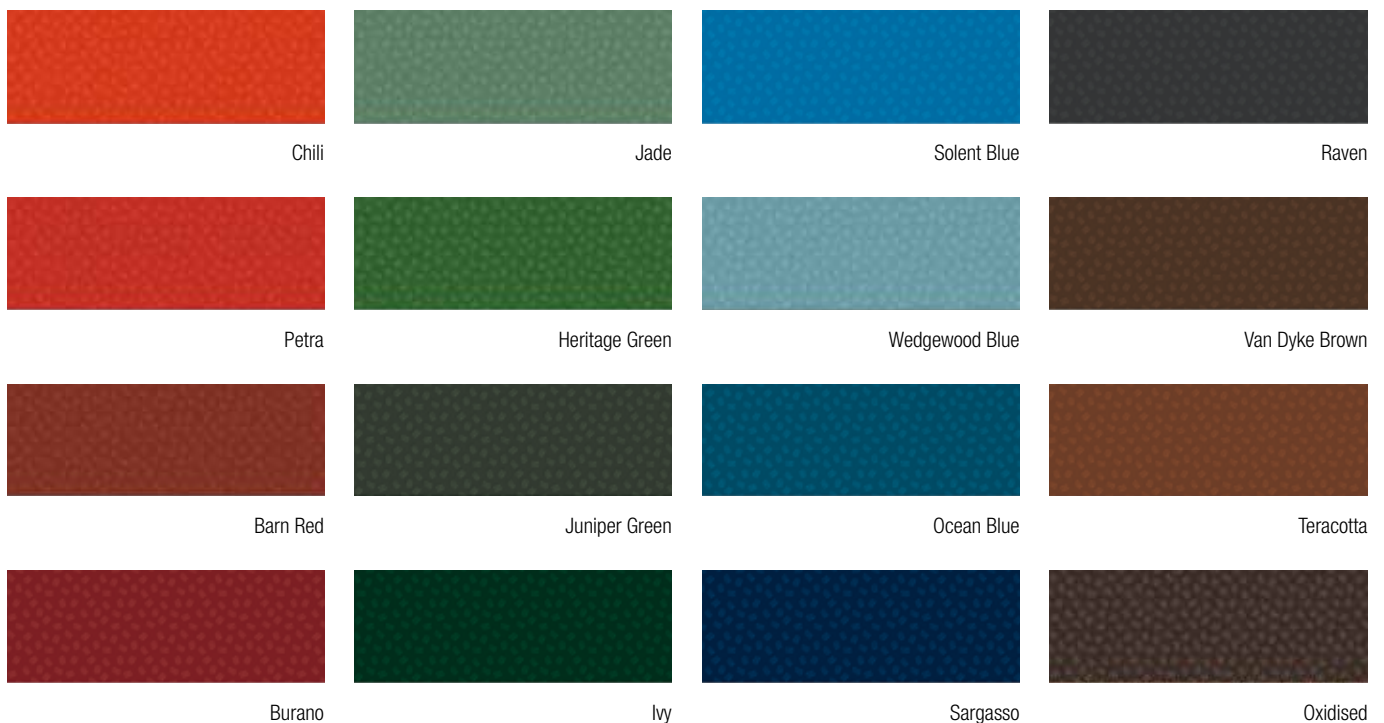

Steel plate paint: 0.55 mm  
 Steel plate Plastisol: 0.60 mm  
 Colorfarm: 0.55 mm  
 Foodsafe: 0.55 mm  
 Stainless steel: 0.50 mm

# Colours


## Plastisol colours




White




Ice Blue



Hamlet




Marlstone



Albatros



Pure Grey




Goosewing Grey



Mushroom




Alaska Grey



Honesty



Merlin Grey




Mole Brown



Anthracite



Meadowland



Moorland Green



Straw




Black



Svelte Grey



Olive Green




Ardenne



Alaska Grey - (Matt)



Green Grey - (Matt)




Teracotta - (Matt)



Anthracite - (Matt)




Steel plate paint: 0.55 mm  
 Steel plate Plastisol: 0.60 mm  
 Colorfarm: 0.55 mm  
 Foodsafe: 0.55 mm  
 Stainless steel: 0.50 mm

# Sawing options

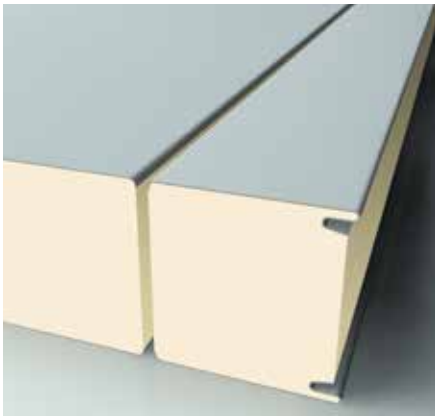


## Sawing options: lengthwise on the panel


- Folded-in edging
- Extremely neat and dimensionally accurate
- No sharp edges
- No rust forming
- No splinters

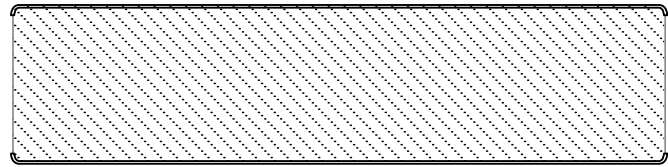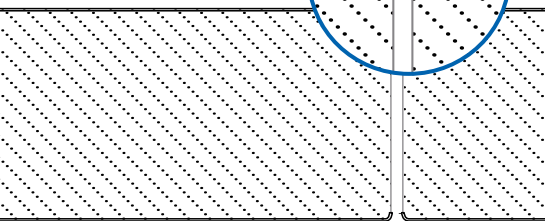


**Type 0**  
No cuts

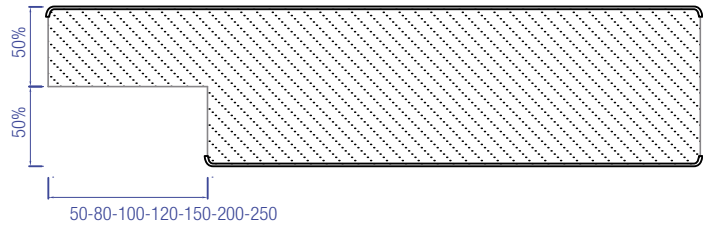


**Type 1**  
Wall with notch (both sides the same colour, no micro profiling)

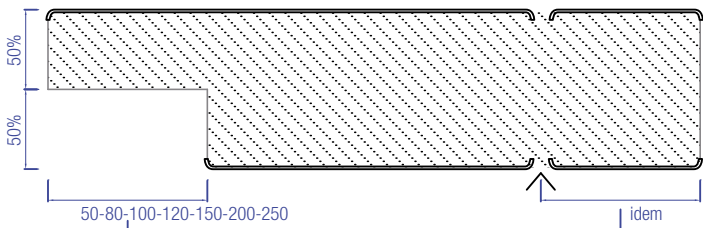

**Type 2**  
Wall with notch and additional saw cut (both sides the same colour, no micro profiling)

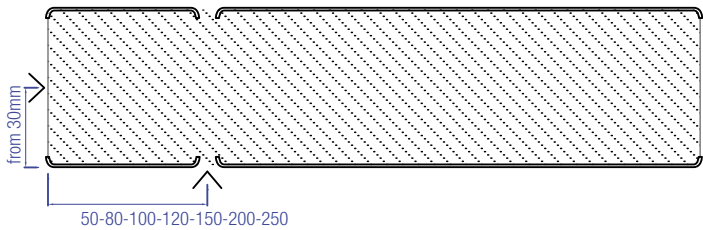

**Type 3**  
Wall with saw cut

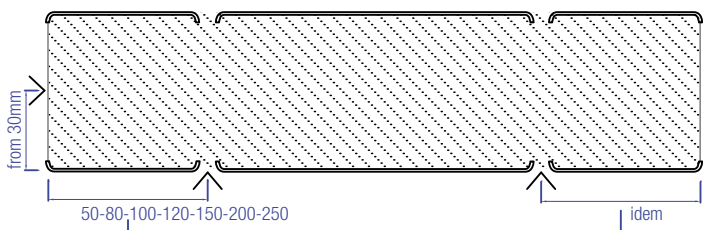

**Type 4**  
Wall with 2 saw cuts

**Version: November 2017** This replaces all previous versions Subject to modifications. All details are intended as general information about our products and their application possibilities and do not form a guarantee about particular characteristics of these products. Therefore, no rights can be derived from the contents of this publication. © 2017