

EPS Panel

EPS - Insulation

The EPS (Expanded Polystyrene) insulated sandwich panels by Unisol are used in a wide range of applications. The major advantages of the EPS sandwich panel are the constant insulation value, its construction properties (strength) and, last but not least, the large span that can be achieved with them. A durable product, recyclable with excellent properties.


Application: Internal & external

Technical details:

- Cover width: 1190 mm
- Steel plate thickness: 0.55 mm (standard polyester)
- Steel quality: S280GD+Z275
- Thickness: 50 to 300 mm (non-standard thicknesses on request)
- Length: 600 – 15,000 mm
- Insulation: Modified flame-retardant grade
- Colour: Your choice
- Profiling: Your choice

Description of steel plate:

- Paint: Polyester paint 25 µm steel thickness 0.55 mm gloss level 30%
- Plastisol: HPS Plastisol 200 µm steel thickness 0.60 mm
- Foodsafe: Foodsafe Coating 9010 55 µm steel thickness 0.55 mm (PET)
- Colorfam: Colorfarm Coating 9002 55 µm steel thickness 0.60 mm for aggressive environments

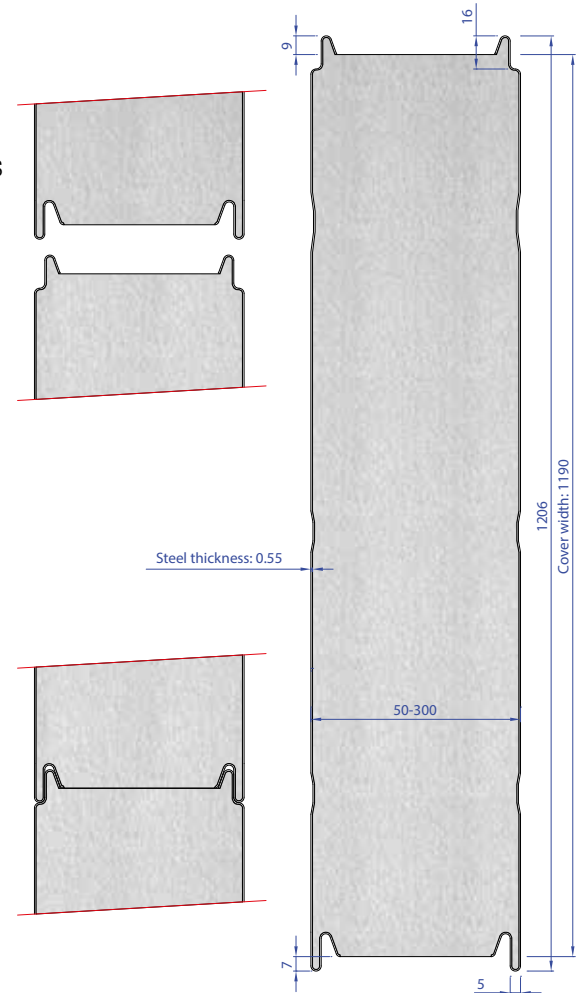

Thickness mm	Weight kg/m ²	Rc value in m ² K/W	Fire-retardant minutes	Noise dampening dB(A)	Span metres*
50	10.12	1.39			4.00
60	10.34	1.67			5.00
80	10.72	2.22	according to:	Report description	6.00
100	11.12	2.78	NEN 3883		8.00
120	11.52	3.33			9.00
150	12.12	4.17	DIN=B1		10.00
200	13.12	5.56			12.00
250	14.12	6.94	DIN 4102		14.00
300	15.12	8.33			15.00



*Experience-based figure for maximum span

Optical profiles




Standard profile

Application: 2 sides

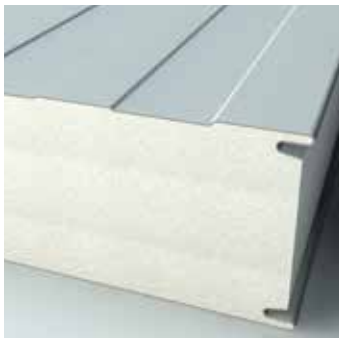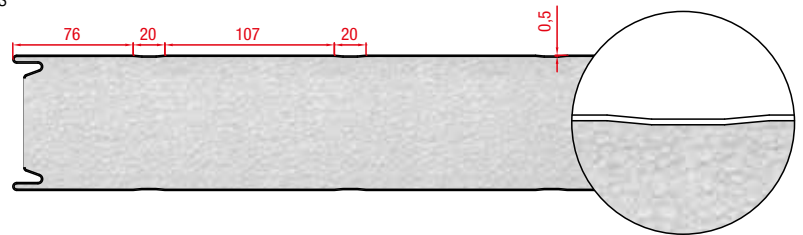


Box profile

Application: 2 sides

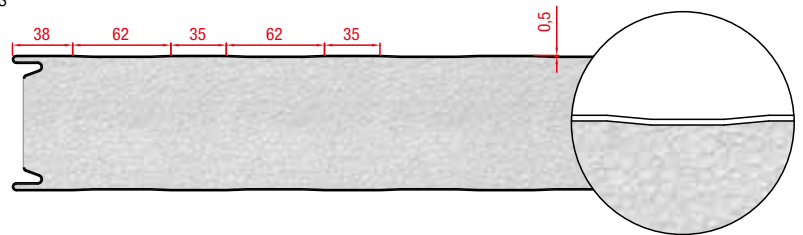

Micro lining

Application: 1 side

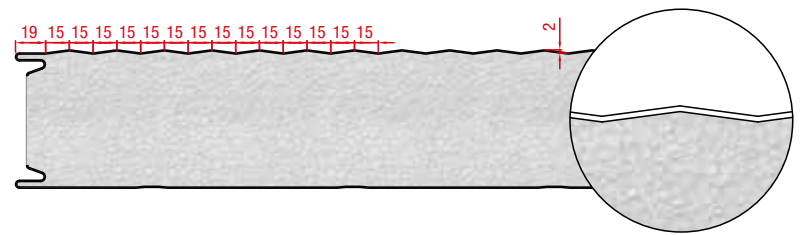

Plain

Application: 2 sides




Colours

Standard paint colours



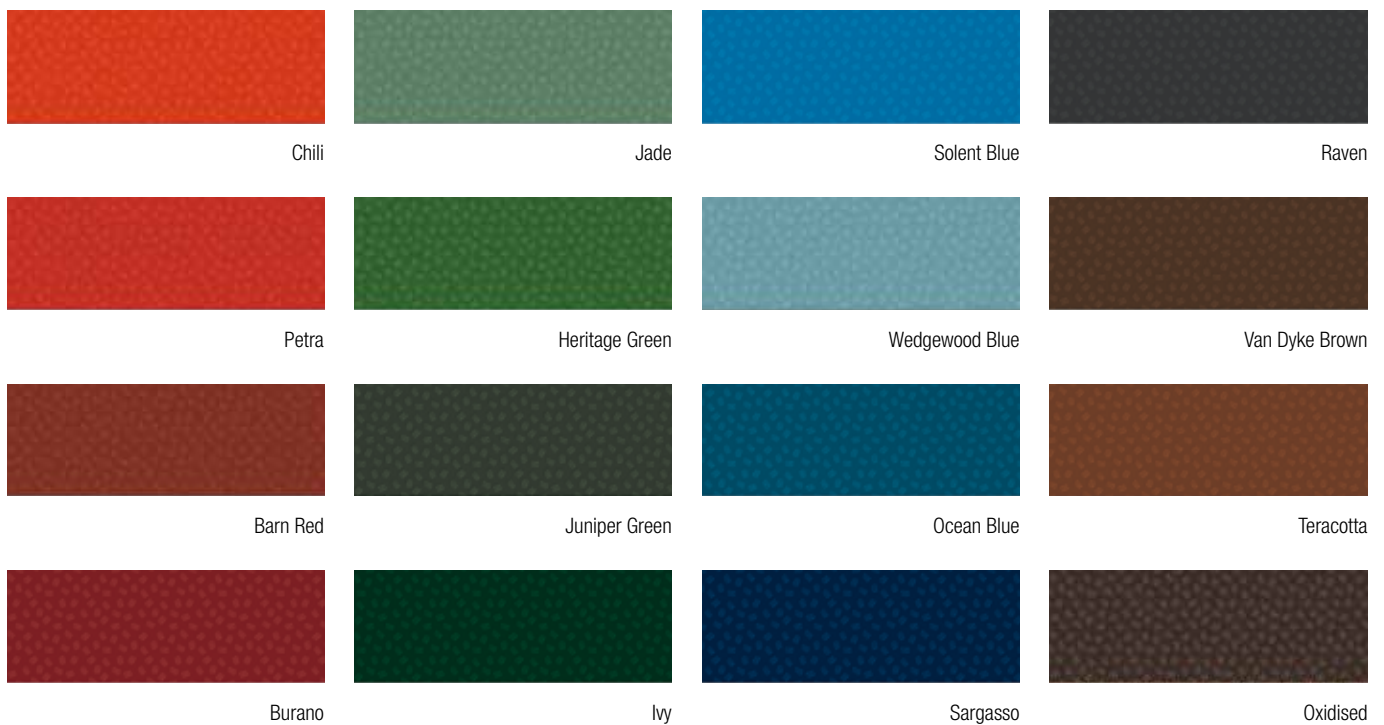

Plastisol colours



Steel plate paint: 0.55 mm
 Steel plate Plastisol: 0.60 mm
 Colorfarm: 0.55 mm
 Foodsafe: 0.55 mm
 Stainless steel: 0.50 mm


Colours

Plastisol colours

			
White	Ice Blue	Hamlet	Marlstone
			
Albatros	Pure Grey	Goosewing Grey	Mushroom
			
Alaska Grey	Honesty	Merlin Grey	Mole Brown
			
Anthracite	Meadowland	Moorland Green	Straw
			
Black	Svelte Grey	Olive Green	Ardenne
			
Alaska Grey - (Matt)	Green Grey - (Matt)	Teracotta - (Matt)	Anthracite - (Matt)




Steel plate paint: 0.55 mm
 Steel plate Plastisol: 0.60 mm
 Colorfarm: 0.55 mm
 Foodsafe: 0.55 mm
 Stainless steel: 0.50 mm

Sawing options

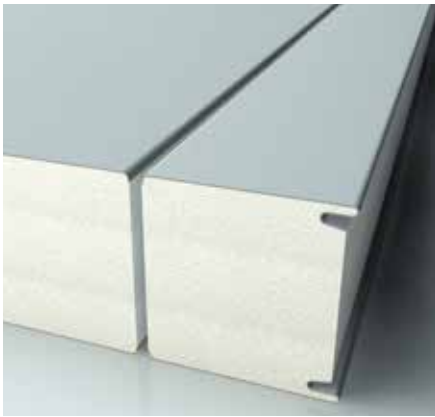


Sawing options: lengthwise on the panel


- Folded-in edging
- Extremely neat and dimensionally accurate
- No sharp edges
- No rust forming
- No splinters
- Price on request

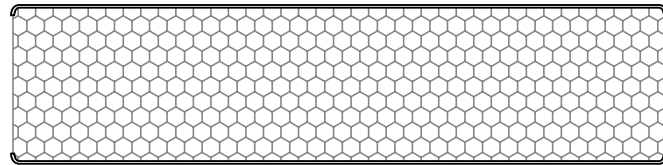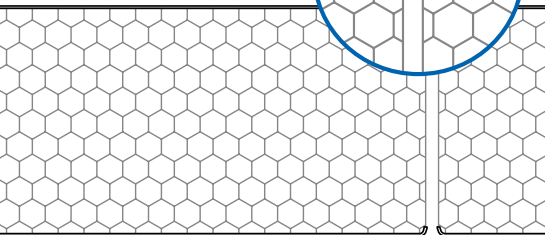


Type 0
No cuts

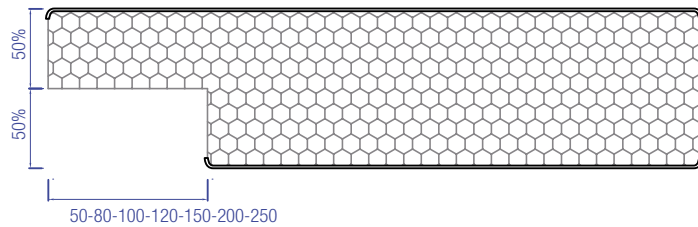


Type 1
Wall with notch (both sides the same colour, no micro profiling)

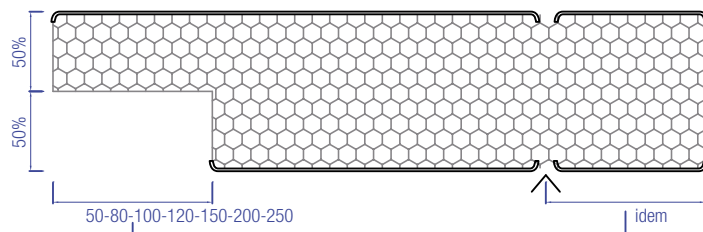

Type 2
Wall with notch and additional saw cut (both sides the same colour, no micro profiling)

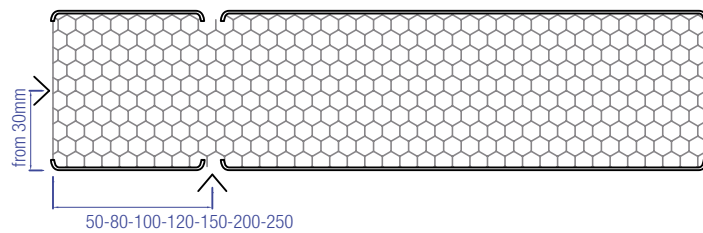

Type 3
Wall with saw cut

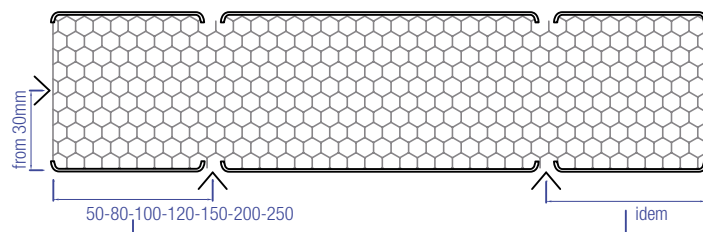

Type 4
Wall with 2 saw cuts

Version: November 2017 This replaces all previous versions Subject to modifications. All details are intended as general information about our products and their application possibilities and do not form a guarantee about particular characteristics of these products. Therefore, no rights can be derived from the contents of this publication. © 2017